

Description


The ZT-MNS-70V-XFMR transformer provides a simple means to significantly increase the distance between the ZT-MNS-100BAS cabinet and the various speaker/zones connected to it. The transformer converts the 25 VRMS speaker output to 70 VRMS, thereby reducing power losses in long wire runs.

The transformer is housed in a 8"x7" metal enclosure with no user controls inside. A five conductor cable connects the transformer to the ZT-MNS-100BAS panel. The ZT-MNS-70V-XFMR can be mounted in a convenient location near the base panel.



Features

- 25 VRMS to 70 VRMS audio conversion for long wire runs
- Five conductor connection between ZT-MNS-100BAS and ZT-MNS-70V-XFMR enclosure
- Mounts conveniently near the ZT-MNS-100BAS

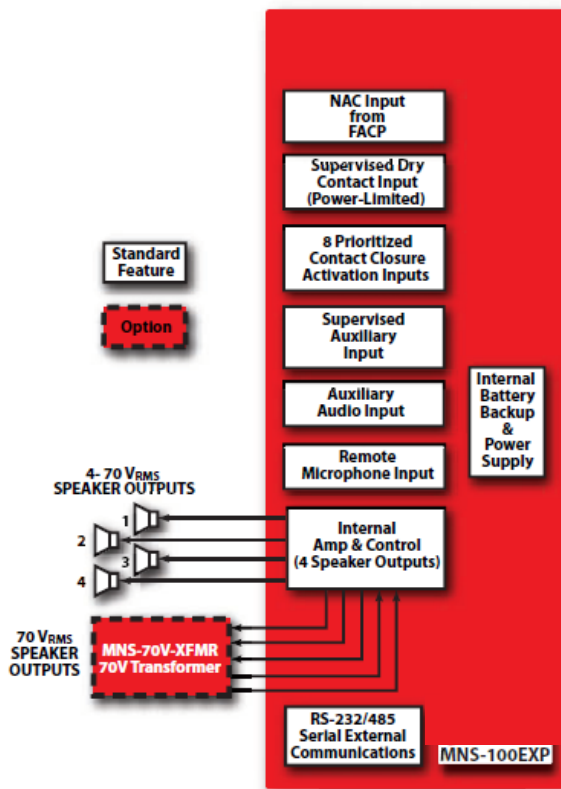

Specifications

Specifications are subject to change without notice due to product improvements.

Input	25 VRMS audio 100 Watts continuous
Output	70 VRMS audio 100 Watts continuous
Installation Enclosure	surface mount indoor; 8-1/4" h x 7-1/4" w x 3-3/4" d; painted steel
Weight	6 lbs. (2.72 kg)
Temperature Range	32°F to 120°F (0°C to 49°C)
Humidity	90% maximum, non-condensing
Approvals/Listings	ETL Pending

All specifications are subject to change without any notice. For more information, contact Velocity website.

Distributed By: