

Description

The ZT-MNS-MNS-RM/B is a remote microphone for use with the ZT-MNS-100BAS voice evacuation panel.

Only one remote microphone can be used with each audio panel. (note the ZT-MNS-100BAS panel includes a microphone.)

The ZT-MNS-RM/B microphone can be located up to 100ft from the main panel and to provide paging and live 'override' of the pre-recorded message and alert tones.

The microphone and interconnecting wires are supervised. A fault will cause the control boards system LED, and remote Mic Fault LED to light.

The surface mounting steel enclosure provides a key locking hinged cover. The device can be placed in an entry way for access by authorised personnel only.



Specifications

Input: Volt / Amp: 24 VDC / 0.06A

Output: Compatible with ZT-MNS-100BAS

Wiring: Up to 100 feet

18-22 AWG, 4-conductor cable

Shielding is recommended if cable is run in same conduit with SLC


Size: Inches: 7.25 inch (W) x 8.25 inch (H) x 3.5 inch (D)

Centimetres: 18.4 cm (W) x 21 cm (H) x 8.9 cm (D)

Colour: Red

Installation

The location of the remote microphone is determined by the system requirements. Acoustic. It is preferential that they are separated by 10 feet or more.

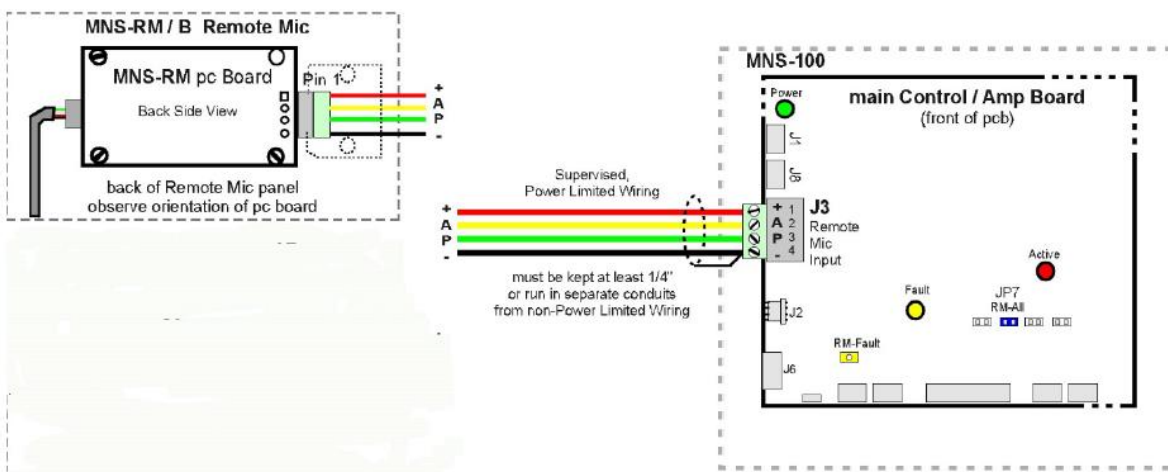

All specifications are subject to change without any notice. For more information, contact Velocity website.

Distributed By: