

Emergency Telephone System Control Panel - Red Handset



Description

The ETS is designed as a fireman's telephone system and/or a disabled refuge system, or a combination of both.


This system will enable the emergency services to maintain a constant contact with people in the refuge area who may seek assistance. It also allows fire fighters and others to communicate during an emergency situation.

The ETS-CP/R control panel can accommodate up to 120 outstations (TS-OS, JS-OS & HF-OS) on a 1000 metre loop.

Features

- Integral 24Vdc power supply 5 Amp
- LCD Display
- 7 Status LEDs
- Fault & alarm relay output
- 4 Wire system (2 x Power & 2 x Communication)

Dimensions (mm)

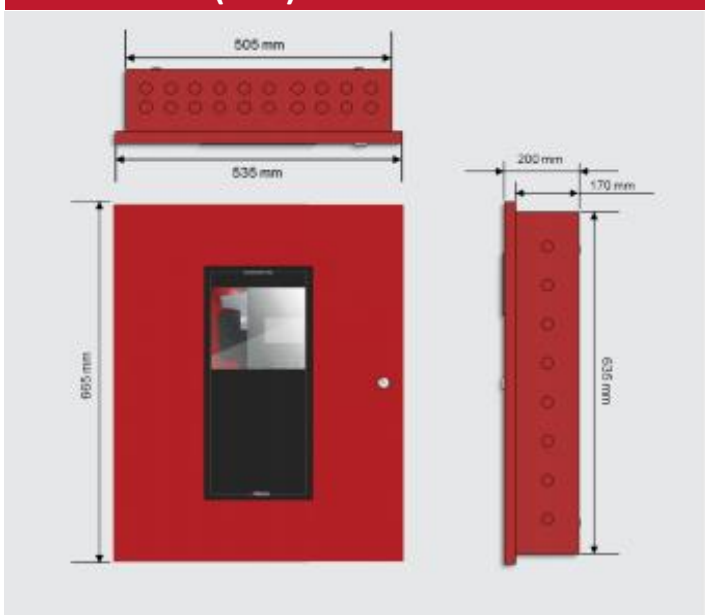

Technical Specifications

Handset Colour	Red
Total No. of Outstations	120
System Voltage	24Vdc
Max Bus Length	1000m
Bus Voltage	24Vdc
Standby Current	240mA
Full Load Current	500mA
Operating Temperature	< 50°C
Relative Humidity	< 90% RH
Integral Power Supply	5.0A
Max Battery Sizes	34.0A
Weight	18.50kg